


TECHNICAL DATA SHEET

COMBO HALOGEN FREE– FLEXIBLE CONDUIT 320N

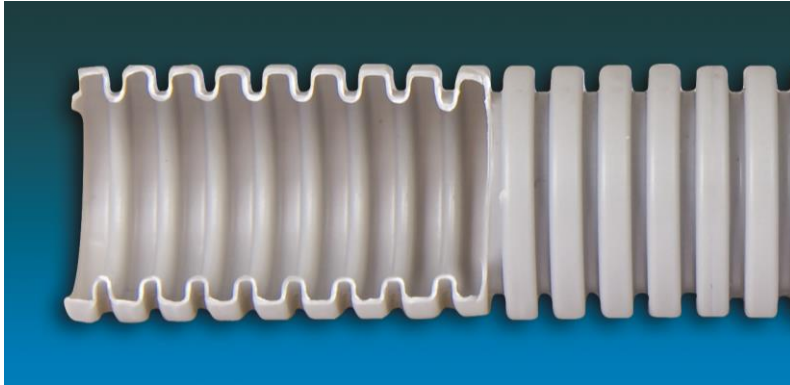

GENERAL DESCRIPTION:

- Corrugated (spiral), pliable
- Suitable for light mechanical loads
- Made of POLYPROPYLENE– (PP)
- RAL 7035 (LIGHT GREY) (on request RAL9010 White)
- Self-Extinguising

APPLICATIONS:

- Indoor residential and industrial installations
- Cable routing through masonry – Flush installations

PROPERTIES:

Resistance to compression at 22±2°C
Resistance to Impact at -5°C
Minimum temperature limit
Maximum temperature limit
Insulation resistance
Dielectric strength

CLASSIFICATION

320N/5cm 2
m:1kg/h:100mm 2
- 15°C 3
+90°C 2
> 100 MΩ
2 kv / 15 min

CODE	TYPE	INSIDE DIAMETER	OUTSIDE DIAMETER	COLOR	UM	LENGHT	PACKAGING
31-21070-016	16	10.7	16	GREY	M	100	100
31-21071-020	20	14.1	20	GREY	M	100	100
31-21072-025	25	18.3	25	GREY	M	50	50
31-21073-032	32	24.3	32	GREY	M	25	25

APPLICATION STANDARDS: EN 61386-1/2004, EN 61386-22/2004+A11/2010, EN 60754-1/2014, EN 60754-2/2014, EN 61034-2/2005+A1/2013